

## M-686 PLine® XY Piezo Linear-Motor Stage

### Fast, Low Profile and Large Aperture with Direct Position Measurement



The M-686.D64 open-frame stage with closed-loop piezo motors provides 25 x 25 mm travel range

- **Integrated Closed-Loop Piezomotor Drives Provide High Speed to 100 mm/s**
- **Travel Ranges 25 x 25 mm**
- **Integrated Linear Encoders with 0.1 µm Resolution**
- **Compact Design:**  
32 mm Profile Height, 170 x 170 mm Footprint
- **Clear Aperture 78 x 78 mm, 66 x 66 mm in Extreme Position**
- **Self-Locking at Rest**
- **Compatible with PI Piezo Nanopositioning / Scanning Stages**

M-686 open-frame piezomotor stages are mainly designed for automated positioning applications in microscopy. The optimized form factor with a low profile height of only 32 mm and the standardized mounting pattern allows the combination with many PI standard nanopositioning systems.

#### Space Saving Piezomotors

Compared to conventional motorized translation stages, the M-686 provides a lower profile and smaller footprint. The compact PLine® piezoelectric linear motors and high-resolution linear encoders make both, the lead screw duct and the flanged, bulky stepper motor employed in traditional stages obsolete. In addition, the piezomotors are self-locking at rest and hold the stage in a stable position without heating up.

#### Compatibility to PI Nanopositioning and Scanning Stages

A number of standard PI piezo flexure stages (150 x 150 mm footprint) can be mounted directly on the M-686 open-

frame stage. Depending on the application, these highly specialized, ultra-precise nanopositioning systems are available as fast XY scanners (for fluorescence microscopy), as vertical Z positioners (3D imaging), or with up to 6 degrees of freedom.

#### Limit and Reference Switches

For the protection of your equipment, non-contact Hall-effect limit and reference switches are installed. The direction-sensing reference switch supports advanced automation applications with high precision.

#### Advantages of PLine® Micropositioning Systems

The ultrasonic piezoceramic drives used in PLine® micropositioners have a number of advantages over classical drives:

- Higher Accelerations, up to 5 g
- Speeds up to 500 mm/s
- Small Form Factor
- Self-Locking When Powered Down
- No Shafts, Gears or Other Rotating Parts
- Non-Magnetic and Vacuum-Compatible Drive Principle

#### Ordering Information

**M-686.D64**  
XY Open-Frame Stage with Closed-Loop PLine® Piezomotor Drives, 25 x 25 mm, 7 N, 0.1 µm Linear Encoder

**Ask about custom designs!**

#### Notes

Nanopositioning stages that fit directly on the M-686:

#### P-561 to P-563

PIMars™ XYZ Nanopositioning systems with up to 300 µm travel

#### P-541.2 to P-542.2

Low-profile microscopy XY scanners

#### P-541.Z


Low-profile Z/tip/tilt piezo nanopositioning stages for microscopy

Customized M-686 stage with a bigger footprint, to sink the piezo Z scanner. The system height together with the P-541 piezo scanner is reduced to only 33 mm



#### Application Examples

- Biotechnology
- Microscopy
- Scanning microscopy
- Confocal microscopy
- Semiconductor testing
- Handling

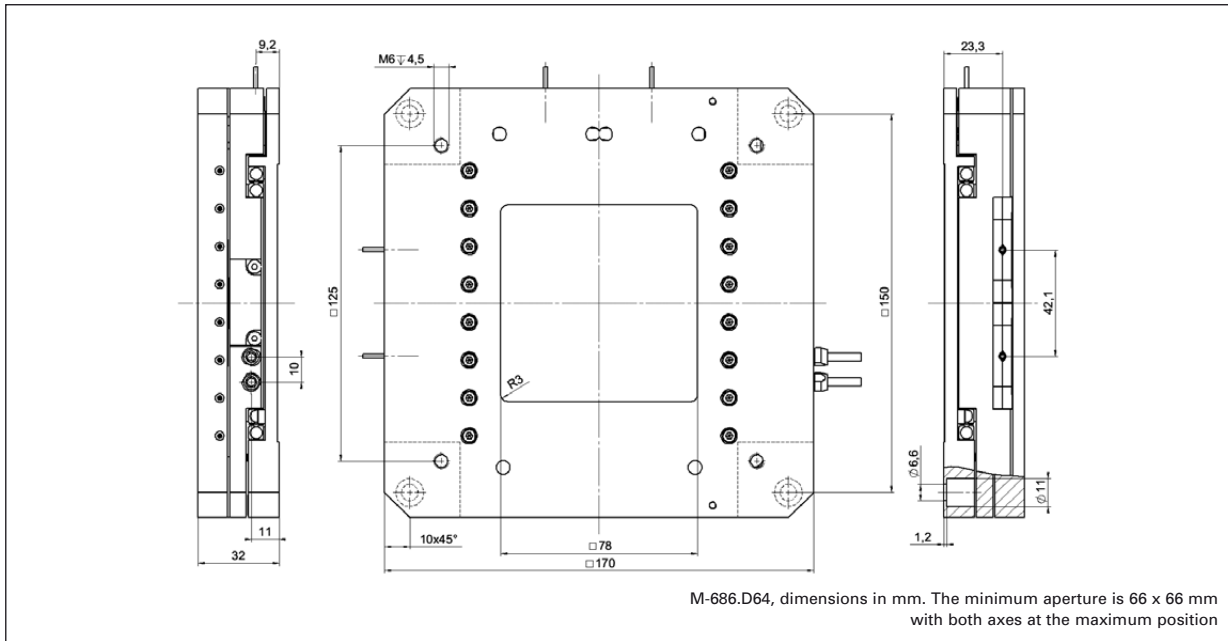

M-686.D64, dimensions in mm. The minimum aperture is 66 x 66 mm with both axes at the maximum position

## Technical Data

<b>Model</b>	<b>M-686.D64</b>
Active axes	XY
<b>Motion and positioning</b>	
Travel range	25 x 25 mm
Integrated sensor	Linear encoder
Sensor resolution	0.1 $\mu$ m
Design resolution	0.1 $\mu$ m
Min. incremental motion	0.3 $\mu$ m
Bidirectional repeatability	0.3 $\mu$ m
Pitch / yaw	$\pm 50$ $\mu$ rad
Max. velocity	100 mm/s
<b>Mechanical properties</b>	
Load Capacity*	50 N
Max. push/pull force	7 N
Max. lateral force	4 N
<b>Drive properties</b>	
Motor type	2 x PLine® P-664 per axis
Operating voltage	190 V (Peak-Peak)** 67 V (RMS)**
Electrical power	10 W / axis***
<b>Miscellaneous</b>	
Operating temperature range	-20 to +50 °C
Material	Aluminium (black anodized)
Mass	1.2 kg
Cable length	1.5 m
Connector	2 x MDR connector, 14-pin
Recommended controller/driver	2 x C-867.D64 single-axis controller / driver 2 x C-185.D64 single-axis drive electronics for external servo-controllers (p. 4-116, p. 1-36)


\*10 N for max. velocity

\*\*The operating voltage or the piezomotor is supplied by the drive electronics which requires 12 VDC

\*\*\*For drive electronics



M-686 open-frame stage with P-541.2DD piezo scanner on top, providing a resolution of 0.1 nm and a scanning range of 30 x 30  $\mu$ m. The system height of the combination with the P-541 XY (or Z) piezo scanner is only 48 mm

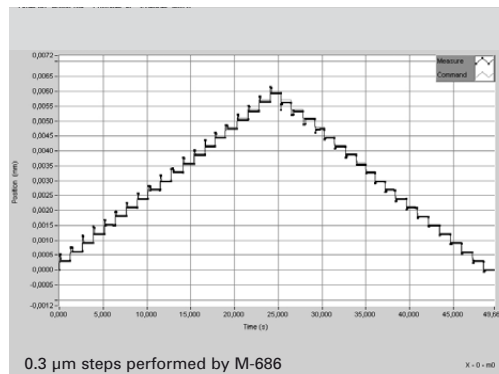

Linear Actuators & Motors

Nanopositioning / Piezoelectrics

Nanometrology

**Micropositioning**

Hexapod 6-Axis Systems /  
Parallel Kinematics

**Linear Stages**

Translation (X)

Vertical (Y)

**Multi-Axis**

Rotary & Tilt Stages

Accessories

Servo & Stepper  
Motor Controllers

Single-Channel

Hybrid

Multi-Channel

Micropositioning  
Fundamentals

Index