


P-010.xxP – P-056.xxP PICA™ Power Actuator

Piezo Stack Actuators for High-Level Dynamic Applications

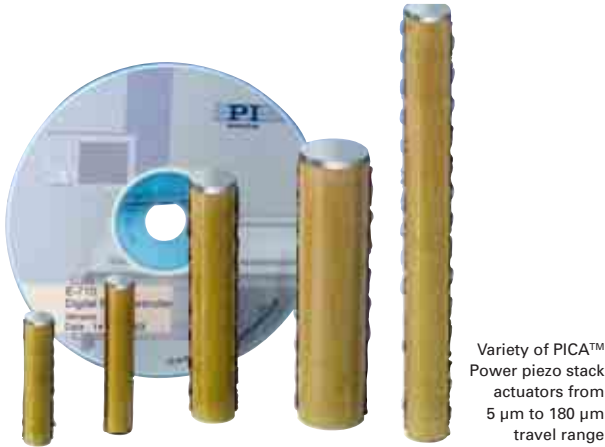

Variety of PICA™ Power piezo stack actuators from 5 µm to 180 µm travel range

- Operating Temperature to 150 °C
- High Load Capacity to 80 kN
- High Force Generation to 70 kN
- Large Cross Sections to 56 mm Diameter
- Extreme Reliability >10⁹ Cycles
- Sub-Millisecond Response, Sub-Nanometer Resolution
- UHV Versions to 10⁻⁹ hPa
- Non-Magnetic Versions
- Temperature Sensor PT1000 Applied

PICA™ Power piezoceramic stack actuators are offered in a large variety of standard shapes and sizes, with additional custom designs to suit any application. Based on the PIC 255 material, PICA™ Stack

actuators are optimized for high-temperature working conditions and high-duty-cycle dynamic applications.

High Displacement with Ultra-High Reliability

PICA™ Power actuators are optimized for high-temperature working conditions and high-duty-cycle dynamic applications.

All PICA™ piezo ceramics are specifically designed for high-duty-cycle applications. With PI's extensive applications knowledge, gained over several decades, performance does not come at the price of reliability. All materials used are specifically matched for robustness and lifetime. Endurance tests on PICA™ actuators prove consistent performance, even after billions (1,000,000,000) of cycles.

Flexibility / Short Leadtimes

All manufacturing processes at PI Ceramic are set up for flexibility. Should our standard actuators not fit your application, let us provide you with a custom design. Our engineers will work with you to find the optimum solution at a very attractive price, even for small quantities. Some of our custom capabilities are listed below:

- Custom Materials
- Custom Voltage Ranges
- Custom Geometries (Circular, Rectangular, Triangular, Layer Thickness ...)
- Custom Load / Force Ranges
- Custom Flat or Spherical Endplates (Alumina, Glass, Sapphire, ...)
- Extra-Tight Length Tolerances
- Integrated Piezoelectric Sensor Discs
- Special High / Low Temperature Versions
- Vacuum Compatible Versions

Because all piezoelectric materials used in PICA™ actuators are manufactured at PI Ceramic, leadtimes are short and quality is outstanding. All standard and custom actuators are deliv-

ered with performance test sheets.

Piezo Drivers, Controllers & High-Voltage Amplifiers


PI offers a wide range of piezo control electronics, from low-power drivers to the ultra-high-performance E-481 power amplifier delivering 2000 W of dynamic power. For closed-loop positioning applications, a variety of analog and digital controllers is also available. The modular E-500 system can be upgraded from an amplifier to a servo-controller and offers a variety of computer interfaces. Of course, PI also designs custom amplifiers and controllers (see p. 2-99 ff).

Application Examples


- Nanopositioning
- Active vibration damping
- High-load positioning
- Precision mechanics / -machining
- Semiconductor technology / test systems
- Laser tuning
- Switches
- Smart structures (Adaptronics)
- Nanotechnology



OEM-PICA™ Power piezo actuators are available with cross sections to 56 mm

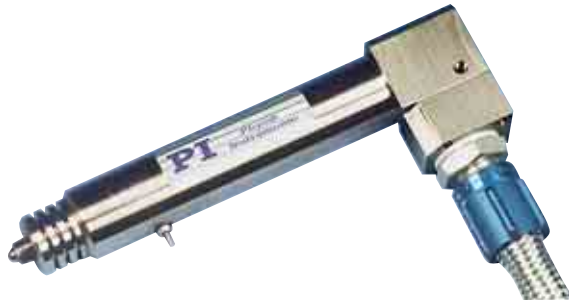

Custom preloaded PICA™ Power piezo actuator with forced-air cooling

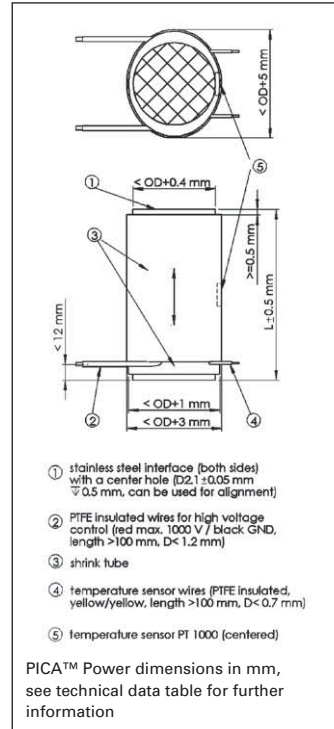

Technical Data / Product Order Numbers

Order number	Displacement [µm] -10/+20%	Diameter D [mm]	Length L [mm] ±0.5	Blocking force [N]	Stiffness [N/µm]	Capacitance [nF] ±20%	Resonant frequency [kHz]
P-010.00P	5	10	9	1200	240	17	129
P-010.10P	15	10	18	1800	120	46	64
P-010.20P	30	10	31	2100	68	90	37
P-010.40P	60	10	58	2200	37	180	20
P-010.80P	120	10	111	2300	19	370	10
P-016.10P	15	16	18	4500	300	130	64
P-016.20P	30	16	31	5400	180	250	37
P-016.40P	60	16	58	5600	94	510	20
P-016.80P	120	16	111	5900	49	1000	10
P-016.90P	180	16	163	6000	33	1600	7
P-025.10P	15	25	20	9900	660	320	58
P-025.20P	30	25	33	12000	400	630	35
P-025.40P	60	25	60	13000	220	1300	19
P-025.80P	120	25	113	14000	120	2600	10
P-025.90P	180	25	165	14000	80	4000	7
P-035.10P	15	35	21	18000	1200	530	55
P-035.20P	30	35	34	23000	760	1200	34
P-035.40P	60	35	61	26000	430	2500	19
P-035.80P	120	35	114	28000	230	5200	10
P-035.90P	180	35	166	29000	160	7800	7
P-045.20P	30	45	36	36000	1200	2100	32
P-045.40P	60	45	63	41000	680	4300	18
P-045.80P	120	45	116	44000	370	8800	10
P-045.90P	180	45	169	45000	250	13000	7
P-056.20P	30	56	36	54000	1800	3300	32
P-056.40P	60	56	63	66000	1100	6700	18
P-056.80P	120	56	116	68000	570	14000	10
P-056.90P	180	56	169	70000	390	21000	7

Standard piezo ceramic type: PIC 255
 Recommended preload for dynamic operation: 15 MPa
 Maximum preload for constant force: 30 MPa
 Resonant frequency at 1 V_{pp} unloaded. The value is halved for unilateral clamping
 Capacitance at 1 V_{pp}, 1 kHz blocking force at 1000 V
 Operating voltage: 0 to 1000 V
 Operating temperature range: -20 to +150 °C
 Standard mechanical interfaces: steel plates, 0.5 to 2 mm thick (depends on model)
 Standard electrical interfaces: two PTFE-insulated wires, pigtail length 100 mm
 Available options: integrated piezo sensor or strain gauge sensors, non magnetic, vacuum compatible, etc.
 Other specifications on request.

Linear Actuators & Motors

PiezoWalk® Motors / Actuators

PILine® Ultrasonic Motors

DC-Servo & Stepper Actuators

Piezo Actuators & Components

Guided / Preloaded Actuators

Unpackaged Stack Actuators

Patches/Benders/Tubes/Shear..

Nanopositioning/Piezoelectrics

Nanometrology

Micropositioning

Index

P-225, P-235 PICA™ Power Piezo Stack Actuators

Preloaded High-Load Piezo Actuators (HVPZT) w/ Sensor Option



High-load piezo actuators P-235.1S, .4S and .9S, P-225.8S and .1S (from left) with CD for size comparison

- **Extremely High Stiffness**
- **Pushing Forces to 30,000 N**
- **Pulling Forces to 3500 N**
- **Travel Ranges to 180 µm**
- **Options: Versions for Vacuum, High- and Low-Temperatures and with Water-Resistant Case**

P-225 and P-235 are preloaded, high-load piezo actuators (translators) for static and dynamic applications. They provide sub-millisecond re-sponse and sub-nanometer resolution.

These ultra-high-force linear

Application Examples

- Precision engineering / micromechanics
- Adaptive mechanics
- Active vibration damping
- Adaptronics
- Static and dynamic precision positioning
- Force generation / materials testing


actuators consist of PICA™ Power piezoelectric ceramic-stacks encapsulated in a stainless steel case with stainless steel end pieces and a frictionless internal spring preload. The high load capacity and preload makes them ideal for machining applications and active vibration cancellation.

High Displacement with Ultra-High Reliability

PICA™ Power actuators are optimized for high-temperature working conditions and high-duty-cycle dynamic applications.

All PICA™ piezo ceramics are specifically designed for high-duty-cycle applications. With PI's extensive applications knowledge, gained over sever-

Ordering Information

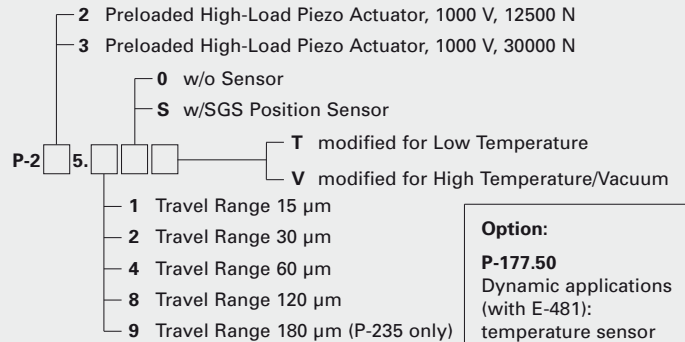

Please read "Options and Accessories" (page 1-102 ff) for further information.
Extensions cables, adapters & connectors: "Accessories" in the "Piezo Drivers / Servo Controllers" (see p. 2-168 ff) section.

Option:

P-177.50
Dynamic applications (with E-481): temperature sensor and protective air for PICA™ HVPZT

P-706.00
Water-resistant case

al decades, performance does not come at the price of reliability. All materials used are specifically matched for robustness and lifetime. Endurance tests on PICA™ actuators prove consistent performance, even after billions (1,000,000,000) of cycles.

Open- and Closed-Loop Models for Optimum Dynamics and Linearity

The standard models are ideal for open loop positioning applications. In this mode the actuator displacement is roughly proportional to the applied voltage.

Open-loop operation is ideal for applications where the fastest response and the highest bandwidth are essential. Here, commanding and reading the target position in absolute values is either not important or carried out by an external feedback loop.

For highest positioning accuracy and repeatability, select the factory installed closed-loop option with integrated ultra-high-resolution strain gauge position sensors and operate with PI servo-control electronics. For more information, read

the tutorial "Piezoelectrics in Positioning" (see p. 2-169 ff).


High Flexibility with PI Amplifiers, Drivers & Controllers

PI offers a wide range of control electronics for piezo actuators from economical, low-power piezo drivers to the E-481 high-performance amplifier / controller providing 2000 W of dynamic power.

For closed-loop operation a wide variety of analog and digital controllers is available. The E-500 modular system can be easily upgraded from an amplifier to a servo controller, including different interface / display modules.

Read details in Mounting and Handling Guidelines (p. 1-67).

High-resolution amplifiers and servo-control electronics, both digital and analog, see selection guide in the "Piezo Drivers / Servo Controllers" section (see p. 2-99 ff).

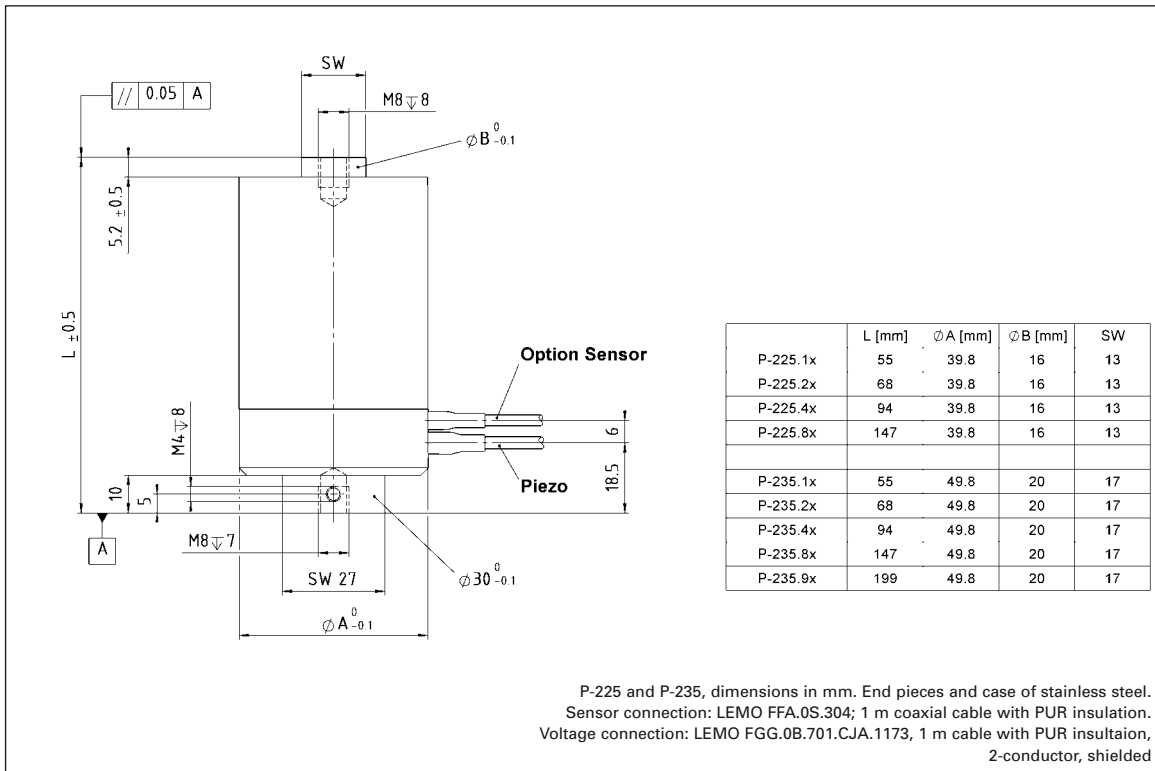
Linear Actuators & Motors

PiezoWalk® Motors / Actuators

PILine® Ultrasonic Motors

DC-Servo & Stepper Actuators

Piezo Actuators & Components

Guided / Preloaded Actuators

Unpackaged Stack Actuators

Patches/Benders/Tubes/Shear..

Nanopositioning / Piezoelectrics

Nanometrology

Micropositioning

Index

Technical Data

Model	P-225.10	P-225.20	P-225.40	P-225.80	P-235.10	P-235.20	P-235.40	P-235.80	P-235.90	Unit	Tolerance
Operating voltage	0 to 1000	0 to 1000	0 to 1000	0 to 1000	0 to 1000	0 to 1000	0 to 1000	0 to 1000	0 to 1000	V	
Motion and positioning											
Closed-loop travel*	15	30	60	120	15	30	60	120	180	µm	
Closed-loop resolution*/**	0.3	0.6	1.2	2.4	0.3	0.6	1.2	2.4	3.6	nm	typ.
Open-loop resolution**	0.15	0.3	0.6	1.2	0.15	0.3	0.6	1.2	1.8	nm	typ.
Linearity*	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	%	typ.
Mechanical properties											
Static large-signal stiffness***	480	330	200	110	860	600	380	210	150	N/µm	±20
Unloaded resonant frequency	14	10	7	4	14	10	7	3,9	2,8	kHz	±20%
Push/pull force capacity	12500 / 2000	12500 / 2000	12500 / 2000	12500 / 2000	30000 / 3500	30000 / 3500	30000 / 3500	30000 / 3500	30000 / 3500	N	Max.
Shear force limit	255	152	84	73	707	420	232	147	147	N	
Torque limit (on tip)	1,5	1,5	1,5	1,5	2	2	2	2	2	Nm	
Drive properties											
El. capacitance	320	630	1300	2600	550	1100	2400	5100	7800	nF	±20%
Dynamic operating current coefficient	33	33	33	33	65	65	65	65	65	µA/(Hz • µm)	±20%
Miscellaneous											
Mass (with cable)	410	470	610	900	580	690	940	1400	1900	g	±5%

*Requires SGS sensor. SGS versions are shipped with performance reports

**Measured with an interferometer. The resolution of piezo actuators is not limited by stiction or friction

***Dynamic small-signal stiffness is ~50% higher

Piezo ceramic type: PICA™ Power

Operating temperature range: -40 to +80 °C

Recommended controller/driver see p. 2-100 ff

For maximum lifetime, voltages in excess of 750 V should be applied only for short durations

See Notes (Technical Data) for further information (see p. 1-106 ff)