M-060 · M-061 · M-062 Precision Rotation Stage

Unlimited Travel Range



- Continuous Rotation Range
- Ultra-High Resolution
- Max. Velocity 90 deg/sec
- Preloaded Worm Drive for Zero Backlash
- ActiveDrive DC-Servo, Stepper-Motor and Manual Drives
- Direction-Sensing Reference Switch

M-06x series rotation stages are equipped with ultra-precise, ultra-low-friction, springpreloaded worm gear drives allowing unlimited rotation in either direction. Models M-060 feature a 60 mm diameter turntable, models M-061, a 100 mm table and models M-062, a 120 mm table.

DC-Motor and Stepper-Motor Drive

One manual drive and three motor drives (four with M-062 models) are available:

Application Examples

- R&D
- Semiconductor testing
- Mass storage device testing
- Metrology
- Photonics packaging
- Quality assurance testing


M-06x.PD with ActiveDrive

This version features a directcoupled motor/encoder. For superior dynamic performance, we integrated our unsurpassed ActiveDrive system. The ActiveDrive design, developed by PI, features a high-efficiency PWM (pulse width servo-amplifier modulation) mounted side-by-side with the DC-Motor and offers several advantages:

- Increased efficiency, by eliminating power losses between the amplifier and motor
- Reduced cost of ownership and improved reliability, because no external driver is required
- Elimination of PWM amplifier noise radiation, by mounting the amplifier and motor together in a single, electrically shielded case

M-06x.DG with Zero-Backlash DC-Motor/Gearhead Drive

The M-06x.DG are equipped with 3-watt DC motors

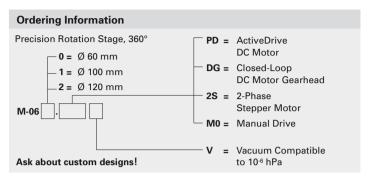

with zero-backlash gearhead and shaft-mounted encoders (2048 counts/rev.). The gear ratio of 29.6:1, provides higher resolution than the direct drive motors.

M-60x.2S Stepper-Motor Drive


The M-060x.2S models feature a cost-effective direct-drive. 2-phase stepper-motor, providing very smooth operation and a resolution of 6400 steps/rev.

Non-Contact Limit and Reference Switches


Motorized models are equipped with an integrated Hall-effect origin switch. To protect your

equipment and increase versatility in automation applications, the rotary stage can optionally be equipped with Hall-effect limit switches. Travel can be limited to a range between 0° and 268° ±2°.

Coarse position can be read from an adjustable scale ring on the outer edge of the turntable graduated in 2 degree increments. The manual versions also feature a driveshaft-mounted indicator with 0.1-degree graduations.

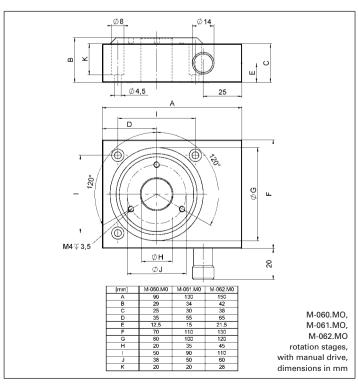



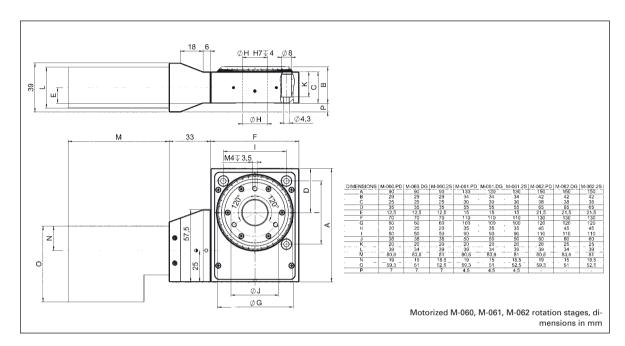

Technical Data

Model	M-060.M0 / M-061.M0 / M-062.M0	M-060.PD / M-061.PD / M-062.PD	M-060.DG / M-061.DG / M-062.DG	M-060.2S / M-061.2S / M-062.2S	Units
Active axes	Rotation	Rotation	Rotation	Rotation	
Motion and positioning					
Rotation range	>360	>360	>360	>360	0
Integrated sensor	-	Rotary encoder	Rotary encoder		
Sensor resolution	_	4000	2000		Cts./rev.
Design resolution	-	32 (0.0018) / 17.5 (0.001) / 15 (0.0008)	2.1 (0.00012) / 1.2 (6.9 x 10 ⁻⁵) / 0.96 (5.5x10 ⁻⁵)	19.7 (0.0011) / 10.9 (0.00063) / 8.9 (0.00051)*	µrad (°)
Min. incremental motion	_	32 / 17.5 / 15	6.3 / 6 / 5	40 / 20 / 18*	μrad
Backlash	-	200 / 200 / 240	200 / 200 / 240	200 / 200 / 240	μrad
Unidirectional repeatability	_	50 / 50 / 60	50 / 50 / 60	50 / 50 / 60	μrad
Max. velocity	-	90	16 / 9 / 7.3	36 / 20 / 16	°/s
Mechanical properties					
Worm gear ratio	50:1 / 90:1 / 110:1	50:1 / 90:1 / 110:1	50:1 / 90:1 / 110:1	50:1 / 90:1 / 110:1	
Gear ratio	-	-	$(28/12)^4:1\approx 29.6:1$	-	
Motor resolution	-	-	-	6400*	steps/rev
Axial force	±500 / ±550 / ±650	±500 / ±550 / ±650	±500 / ±550 / ±650	±500 / ±550 / ±650	N
Max. torque θ_X , θ_Y	±6 / ±6 / ±7	±6 / ±6 / ±7	±6 / ±6 / ±7	±6 / ±6 / ±7	Nm
Max. torque $\boldsymbol{\theta}_{Z}$	±4 / ±6 / ±8	±4 / ±6 / ±8	±4 / ±6 / ±8	±4 / ±6 / ±8	Nm
Drive properties					
Motor type	_	ActiveDrive DC-Motor	DC-Motor, gearhead	2-phase Stepper-Motor*	*
Operating voltage	-	24 (PWM)	12 differential	24	V
Electrical power	_	30	3	-	
Reference switch	Hall-effect	Hall-effect	Hall-effect	Hall-effect	
Miscellaneous					
Operating temperature range	-20 to +65	-20 to +65	-20 to +65	-20 to +65	°C
Material	Aluminum	Aluminum	Aluminum	Aluminum	
Mass	0.42 / 1.36 / 2.24	0.94 / 1.88 / 2.76	0.94 / 1.88 / 2.76	0.96 / 1.9 / 2.78	kg
Recommended controller/driver		C-863 single-axis C-843 PCI board, for up to 4 axes	C-863 single-axis (p. 4-114) C-843 PCI board (p. 4-120), for up to 4 axes	C-663 single-axis (p. 4-1	12)

Linear Actuators & Motors

Nanopositioning/Piezoelectrics

Nanometrology

Micropositioning

Hexapod 6-Axis Systems / Parallel Kinematics

Linear Stages

Translation (X)

Vertical (Y)

Multi-Axis

Rotary & Tilt Stages

Accessories

Servo & Stepper Motor Controllers

Single-Channel

Hybrid

Multi-Channel

Micropositioning Fundamentals

Index

^{*}with C-663 stepper-motor controller **2-phase stepper-motor, 24 V chopper voltage, max. 0.8 A/phase, 400 full steps/rev Data for vacuum versions may differ.